

Hex Head Mounting Bolts

Hex head mounting bolts made from 316 stainless steel are available. 316 stainless steel hex head mounting bolts will be supplied with HD Series interlocks when the letter "M" is shown in the appropriate column of the interlock part number. Reference the HD Series Ordering Guide.


Standard mounting bolt lengths:

a.) 3/8"-16 x 3/4" (for Type B) b.) 3/8"-16 x 1-3/4" (for Type F, T, D and DM) c.) 3/8"-16 x 2-1/4" (for Type D Latch Block & Type U lock)

d.) 1/4"-20 x 5/8" (for Type FN and PPS)

Options:

The 3/8"-16 hex head bolts can be provided with a through hole in which a sealing wire can be secured.

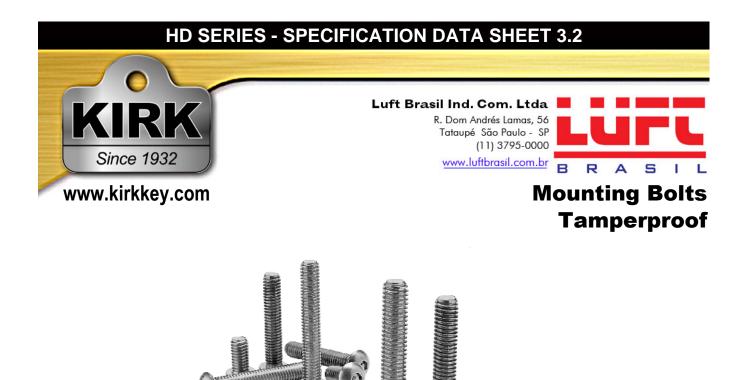

Tamperproof Mounting Bolts

Tamperproof mounting bolts made from 316 stainless steel are available. 316 stainless steel Button Head Socket bolts will be supplied with HD Series interlocks when the letter "T" is shown in the appropriate column of the interlock part number. Reference the HD Series Ordering Guide.

Standard tamperproof mounting bolt lengths:

a.) 3/8"-16 x 3/4" (for Type B) b.) 3/8"-16 x 1-3/4" (for Type F, T, D and DM) c.) 3/8"-16 x 2-1/4" (for Type D Latch Block & Type U lock)

d.) 1/4"-20 x 5/8" (for Type FN and PPS)





A tamperproof key tool or tamperproof bit tool is required to install the tamperproof mounting bolts.

- 3/8" Bolt Key (Part #21HKHKA) shown at top of picture.
- 1/4" Bolt Key (Part #15HKHKA) shown in middle of picture.
- 3/8" Bolt Bit (Part #21HKHB) shown at bottom of picture.