

Hex Head Mounting Bolts


Stainless steel (18-8), hex head mounting bolts are available. Hex head mounting bolts will be supplied when the letter "M" is shown in the appropriate column of the interlock part number. Reference the MD Series Ordering Guide.

Standard mounting bolt lengths:

- a.) 3/8"-16 x 3/4" (for Type B) b.) 3/8"-16 x 1-3/4" (for Type F, T, D and DM) c.) 3/8"-16 x 2-1/4" (for Type D Latch Block & Type U lock)
- d.) 1/4"-20 x 5/8" (for Type FN and PPS)

Options:

The 3/8"-16 hex head bolts can be provided with a through hole in which a sealing wire can be secured.

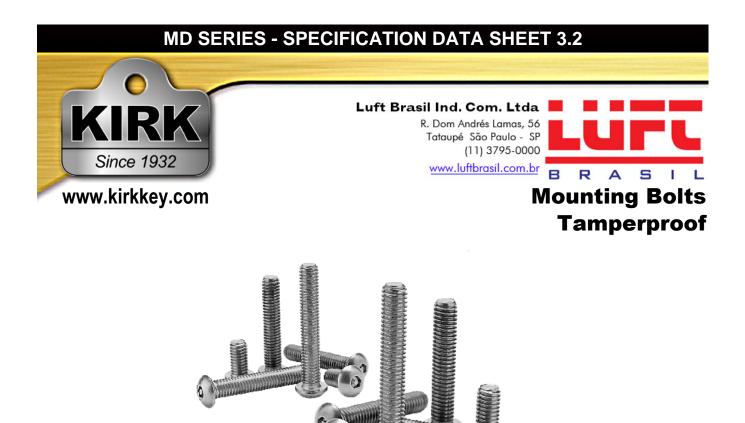


Tamperproof Mounting Bolts

Stainless steel (18-8) tamperproof mounting bolts are available. Button Head Socket bolts will be supplied when the letter "T" is shown in the appropriate column of the interlock part number. Reference the MD Series Ordering Guide.

Standard tamperproof mounting bolt lengths:

- a.) 3/8"-16 x 3/4" (for Type B) b.) 3/8"-16 x 1-3/4" (for Type F, T, D and DM) c.) 3/8"-16 x 2-1/4" (for Type D Latch Block & Type U lock)
- d.) 1/4"-20 x 3/4" (for Type FN and PPS)

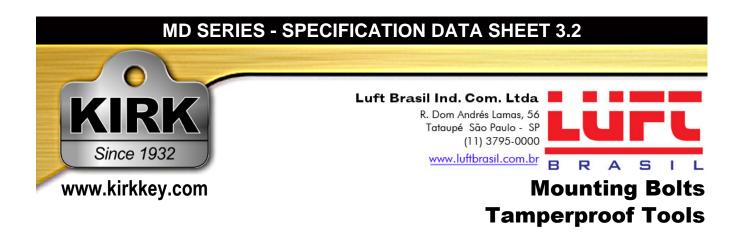



A tamperproof key tool or tamperproof bit tool is required to install the tamperproof mounting bolts.

- 3/8" Bolt Key (Part #21HKHKA) shown at top of picture.
- 1/4" Bolt Key (Part #15HKHKA) shown in middle of picture.
- 3/8" Bolt Bit (Part #21HKHB) shown at bottom of picture.