


# MD Series - Interlock Item Ordering Guide

## Kirk Key Interlock Company

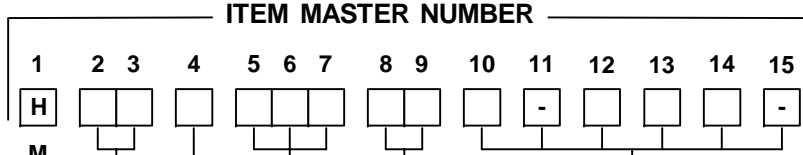

MD Series

**\* REQUIRED INFORMATION \***

<ul style="list-style-type: none"> <li>- Type of Interlock (Columns 2 &amp; 3)</li> <li>- Auxiliary Switch Requirements (Column 4)</li> <li>- Bolt Projection (measured in withdrawn position) special lengths may be added (Columns 5, 6 &amp; 7)</li> <li>- Number of Cylinders and Key Removable Positions (Columns 8 &amp; 9)</li> </ul>	<ul style="list-style-type: none"> <li>- Options desired (where applicable)</li> <li>- Ultimate End User, name and location</li> <li>- Key Interchange</li> <li>- Coordination Requirements</li> <li>- Quantity</li> </ul>
--	--

OPTIONS: Where applicable. If none required, leave blank

**TYPE**

<b>F</b>	<b>L</b>	FLAT MOUNTED (F) - MD Data Sheet 1.1
<b>B</b>	<b>L</b>	BASE MOUNTED (B) - MD Data Sheet 1.2
<b>T</b>	<b>R</b>	TRANSFER (T) - MD Data Sheet 1.3
<b>D</b>	<b>M</b>	ACCESS DOOR (DM) - MD Data Sheet 1.5
<b>D</b>	<b>L</b>	DOOR MOUNTED (D) - MD Data Sheet 1.4

**AUXILIARY SWITCH SELECTION**

**COLUMN 4**

NONE	<b>0</b>
S	<b>3</b>
SS	<b>4</b>
SSS	<b>5</b>
SSSS	<b>6</b>
2 N/O 1 N/C*	<b>A</b>
4 N/O 2 N/C*	<b>B</b>

\* Denotes status of contacts with locking bolt in withdrawn position.  
See MD Data Sheets 2.3 (A&B) & 2.4 (S Switches)

**NUMBER OF CYLINDERS & KEY REMOVABLE POSITIONS**

**BOLT PROJECTION (in withdrawn position)**

**COLUMNS 5,6,7**

-	-	-	
<b>0</b>	<b>0</b>	<b>0</b>	0", 0mm
<b>0</b>	<b>2</b>	<b>5</b>	1/4", 6.4mm
<b>0</b>	<b>3</b>	<b>7</b>	3/8", 9.5mm
<b>0</b>	<b>5</b>	<b>0</b>	1/2", 12.7mm
<b>0</b>	<b>7</b>	<b>5</b>	3/4", 19.1mm
<b>1</b>	<b>0</b>	<b>0</b>	1", 25.4mm
<b>1</b>	<b>2</b>	<b>5</b>	1-1/4", 31.7mm
<b>1</b>	<b>3</b>	<b>7</b>	1-3/8", 34.9mm
<b>1</b>	<b>5</b>	<b>0</b>	1-1/2", 38.1mm
<b>2</b>	<b>0</b>	<b>0</b>	2", 50.8mm
<b>3</b>	<b>0</b>	<b>0</b>	3", 76.2mm

Be sure to place dashes in columns 5,6 & 7 when ordering T, D or DM interlocks.

**COLUMN 8**    **COLUMN 9**

1-CYL	<b>1</b>	<b>0</b>	<b>E</b>
	<b>1</b>	<b>1</b>	<b>W</b>
2-CYL	<b>2</b>	<b>0</b>	<b>E E</b>
	<b>2</b>	<b>1</b>	<b>E W</b>
3-CYL	<b>3</b>	<b>0</b>	<b>E E E</b>
	<b>3</b>	<b>1</b>	<b>E E W</b>
	<b>3</b>	<b>2</b>	<b>E W W</b>

"W" cylinders (if required) will always be located nearest the lock bolt on any multi-cylinder MD Series Type F, B or D interlock. Multi-cylinder Type DM interlocks will be built with the "W" cylinder (if required) located farthest from the lock bolt.

**OPTIONS DESCRIPTION**

**COLUMN 10** **S** STAMP KEY INTERCHANGE  
See MD Data Sheets 3.4 & 4.1

**COLUMN 11** n/a

**COLUMN 12** **F** DUST COVER  
See MD Data Sheet 3.1

**COLUMN 13** **M** HEX MOUNTING BOLTS  
**T** TAMPERPROOF BOLTS  
See MD Data Sheet 3.2  
(Tamperproof tools available)

**COLUMN 14** **P** ADAPTER PLATES  
Short D, Long D, FN - See MD Data Sheet 3.3



**Luft Brasil Ind. Com. Ltda**

R. Dom Andrés Lamas, 56  
Tataupé São Paulo - SP  
(11) 3795-0000

[www.luftbrasil.com.br](http://www.luftbrasil.com.br)

