



The Type B interlock is base or flange mounted. Many switch, T/R and level detector manufacturers offer provisions for mounting Type B interlocks.

The interlock housing is made from bronze. The key, lock bolt and all internal parts are constructed from 316 stainless steel. The lock bolt is 5/8" diameter and the throw, or travel, of the lock bolt is 3/4". Lock bolt movement is completely controlled by the rotation of the key (or keys in a multi-cylinder interlock).

OPTIONS

Lock Bolt Length - when ordering, specify the length of the locking bolt in the withdrawn position. Standard lengths are 0", 1/4", 3/8", 1/2", 3/4", 1", 2" and 3". Non-standard lengths are also available.

Key Removable - the key(s) is removable when the locking bolt is either in the extended (E) or withdrawn (W) position. Please choose E or W when ordering an interlock. NOTE: Key removable E is the most common because the locking bolt is typically extended to block/engage something.


Multi-Cylinder - up to 5 cylinders available. Please specify E or W key removable position for each cylinder. NOTE: On MD Series Type B interlocks, "W" cylinders will be located nearest the locking bolt.

• Stamp Key Interchange - specify an alphanumeric code to be stamped on the cylinder face and the key (e.g. A1, A2, B1, etc. - up to 5 characters). See MD Series Data Sheet for Keys (3.4) and Terminology (4.1) for details.

• Auxiliary Switches - see MD Series Data Sheets for Type Thermoplastic (2.3) and Type S (2.4) for details.

• Dust Covers - see MD Series Data Sheet for Dust Covers (3.1) for details.

• Mounting Bolts - see MD Series Data Sheet for Mounting Bolts (3.2) for details.

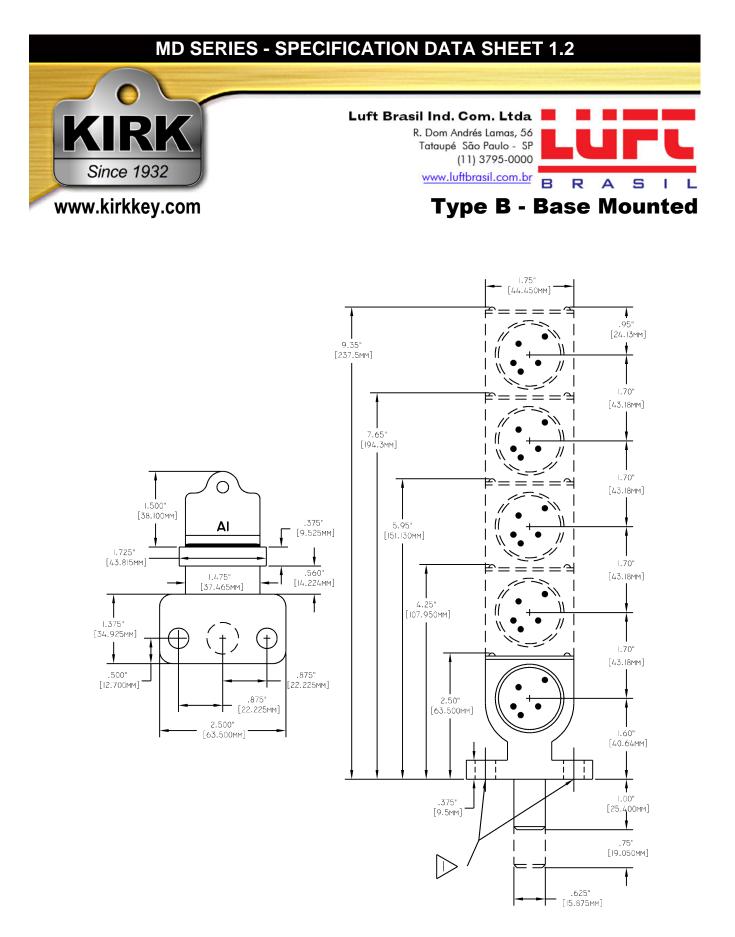

NOTES: 1) 0.4062" (10.32mm) holes for mounting bolts.