



KIRK® SD Series interlocks are manufactured with 7-pin tumbler lock cylinders. The keys are made of nickel-silver and can be furnished to you only by Kirk Key Interlock Company due to the proprietary key section.

OPTIONS

Stamp Key Interchange – specify an alphanumeric code to be stamped on the cylinder face and the key (e.g. A1, A2, B1, etc). The key interchange can be up to five characters long.

Duplicate Keys

Each SD Series interlock is supplied with a key in its lock. These keys are needed during installation of the interlock(s) on equipment. This then provides more keys than are necessary for operation of the interlock system. Once the interlocks have been installed, all extra keys should be removed from the system and destroyed or retained by a responsible person.

If additional keys are required due to loss or damage, please:

1. Print the Duplicate Key Release Form from our web site.

2. Complete the form and sign your name.


3. Fax the form and your purchase order to Kirk Key Interlock Company at (330) 833-1528 for immediate delivery.

Record Keeping

With our extensive record keeping dating back to 1945, you can rely on Kirk Key Interlock Company to coordinate and number your keys in coordination with existing equipment currently in service.

Caution: The existence of duplicate keys in a KIRK® interlock system may compromise the safety of the system. To ensure correct operation of the KIRK® interlock system, it is necessary to remove all loosely or removably held keys before operating the equipment on which the interlocks are mounted. Keys removed from an interlock system should be destroyed or retained by authorized personnel.



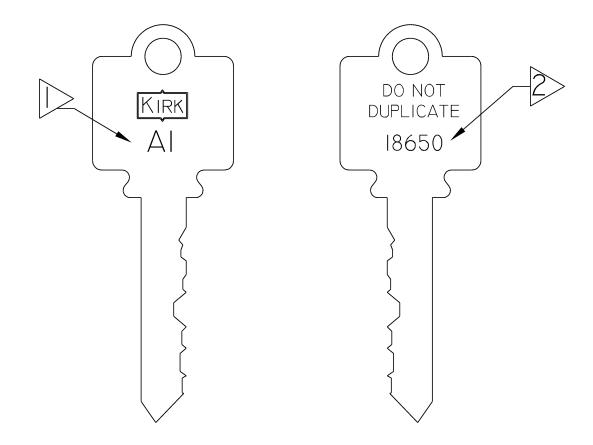

NOTES:

1) Stamp Key Interchange (Optional).

2) Cylinder Combination Number: always stamped on the key and lock – assigned by Kirk Key Interlock Company.