SD SERIES - SPECIFICATION DATA SHEET 1.13



Luft Brasil Ind. Com. Ltda

R. Dom Andrés Lamas, 56 Tataupé São Paulo - SP (11) 3795-0000



Type DY2 - End Mounted



The Type DY2 interlock is made for loose fitting access opening doors. It has two parts: a main body and a latch block-bolt eye. A stainless steel mounting plate is attached to the base of the main body as pictured.

The Type DY2 interlock can be mounted on the surface of the door jamb with the latch blockbolt eye mounted on a bar, which spans the interlocked door.

When the main body is separated from the latch block-bolt eve, the key is retained and cannot turn in the lock. Thus, the key is always held in the lock when the two parts are separated.

By closing the door on which the DY2 interlock is mounted, the latch block-bolt eye is engaged with the main body and the key can be turned and removed.

The DY2 housing and latch block-bolt eve are made of zinc alloy. The dust cover and all interior parts are made of stainless steel. The exterior is painted with powder coat paint. Push On dust cover is included.

OPTIONS

- Stamp Key Interchange specify an alphanumeric code to be stamped on the cylinder face and the key (e.g. A1, A2, B1, etc. - up to 5 characters). See SD Series Data Sheet for Keys (3.4) and Terminology (4.1) for details.
- Latch Block-Bolt Eye DY-2 = None, DY-2A = Longitudinal Type, DY-2B = Transverse Type. See page 3 for drawings.
- Latch Block U-Bolt and Chain an additional mounting option (12 links of chain standard). See photo on SD Series Data Sheet for Type DY3 (1.14).


SD SERIES - SPECIFICATION DATA SHEET 1.13




Luft Brasil Ind. Com. Ltda

R. Dom Andrés Lamas, 56
Tataupé São Paulo - SP
(11) 3795-0000
www.luftbrasil.com.br
BRASI

Type DY2 - End Mounted





NOTES:

1) .2031" (5.159mm) diameter mounting holes (4 holes).


SD SERIES - SPECIFICATION DATA SHEET 1.13




Luft Brasil Ind. Com. Ltda

R. Dom Andrés Lamas, 56 Tataupé São Paulo - SP (11) 3795-0000 www.luftbrasil.com.br

Type DY2 - End Mounted

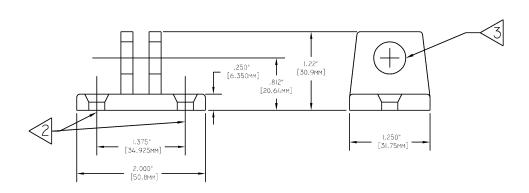

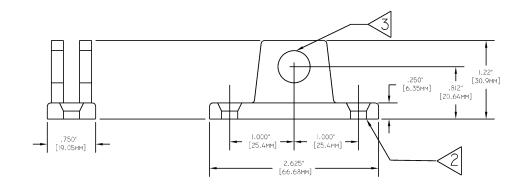

LONGITUDINAL Latch Block-Eye Bolt shown at top. TRANSVERSE Latch Block-Eye Bolt shown below.

NOTES:

- 2) .257" (6.52mm) diameter mounting holes. 3) .500" (12.7mm) diameter hole.