SD SERIES - SPECIFICATION DATA SHEET 1.14



Luft Brasil Ind. Com. Ltda

R. Dom Andrés Lamas, 56 Tataupé São Paulo - SP (11) 3795-0000



Type DY3 - Flush Mounted



The Type DY3 interlock is made for loose fitting access opening doors. It has two parts: a main body and a latch block-bolt eye. A mounting plate is attached to the face of the main body as pictured.

The Type DY3 interlock can be mounted on the door with the latch block-bolt eye mounted on the door jamb so it will engage the main body when the door is closed.

When the main body is separated from the latch block-bolt eye, the key is retained and cannot turn in the lock. Thus, the key is always held in the lock when the two parts are separated.

When the door on which the DY3 interlock is mounted is closed, the latch block-bolt eye is engaged with the main body and the key can be turned and removed.

The DY3 housing and latch block-bolt eye are made of zinc alloy. The dust cover and all interior parts are made of stainless steel. The exterior is painted with powder coat paint. Push On dust cover is included.

OPTIONS

- Stamp Key Interchange specify an alphanumeric code to be stamped on the cylinder face and the key (e.g. A1, A2, B1, etc. up to 5 characters). See SD Series Data Sheet for Keys (3.4) and Terminology (4.1) for details.
- Latch Block-Bolt Eye DY-3 = None, DY-3A = Longitudinal Type, D3-1B = Transverse Type. See page 3 for drawings.
- Latch Block U-Bolt and Chain an additional mounting option (12 links of chain standard).
 See photo above.

SD SERIES - SPECIFICATION DATA SHEET 1.14





Luft Brasil Ind. Com. Ltda

R. Dom Andrés Lamas, 56 Tataupé São Paulo - SP (11) 3795-0000 www.luftbrasil.com.br



Type DY3 - Flush Mounted





NOTES:

1) .1875" (4.76mm) diameter mounting holes (4 holes).

SD SERIES - SPECIFICATION DATA SHEET 1.14





Luft Brasil Ind. Com. Ltda

R. Dom Andrés Lamas, 56 Tataupé São Paulo - SP (11) 3795-0000 www.luftbrasil.com.br



Type DY3 - Flush Mounted

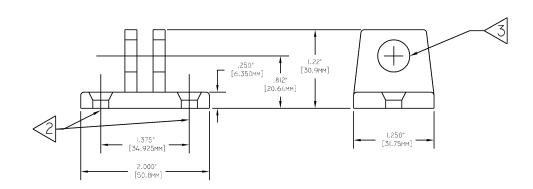

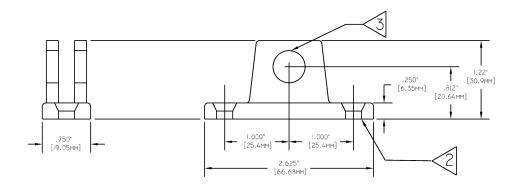

LONGITUDINAL Latch Block-Eye Bolt shown at top. TRANSVERSE Latch Block-Eye Bolt shown below.

NOTES:

- 2) .257" (6.52mm) diameter mounting holes. 3) .500" (12.7mm) diameter hole.